


Dissipative Storage

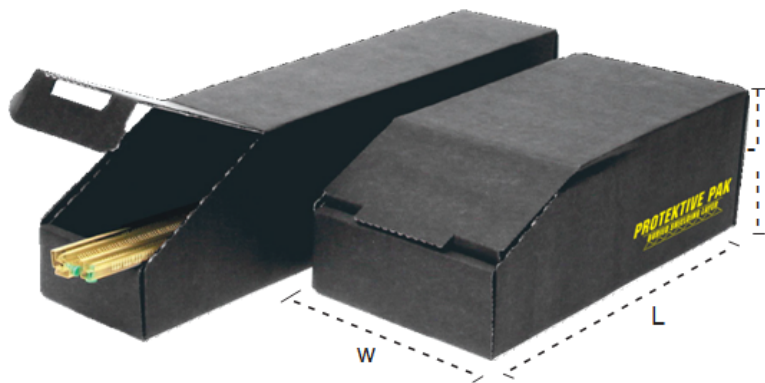

Features

- Economical method of storing static sensitive electronics devices
- Wide choice of sizes
- When reclosable cover is closed, the "Faraday Cage" effect restricts electrostatic charges to exterior of box
- Shipped knocked-down; easy to assemble

Item No.	Size O.D. - L x W x D	Item No.	Size O.D. - L x W x D
37590	12 x 4 x 4-1/2	37594	18 x 6 x 4-1/2
37591	12 x 6 x 4-1/2	37598	24-3/4 x 2 x 4-1/2
37599•	12 x 8 x 4-1/2	37595	24-3/4 x 4 x 4-1/2
37592	12 x 12 x 4-1/2	37596	24-3/4 x 6 x 4-1/2
37593	18 x 4 x 4-1/2	37597	24-3/4 x 8 x 4-1/2

• This item is not stocked

Meets the required limits of ANSI/ESD S20.20, and Packaging standard ANSI/ESD S541.

SPECIFICATIONS

Properties

Surface Resistance

Discharge Shielding

Sloughing Test

Recyclability

Typical Values

1 x 10⁹ to < 1 x 10¹⁰ ohms

< 50 nanoJoules

Negligible surface damage at 10 cycles and <5% of surface damage at 200 cycles in Taber Abrasion Test.

No conductive particles abraded from surface

Complete recyclability of package

Test Procedures/Method

ANSI/ESD STM11.11

ANSI/ESD STM 11.31


ASTM D4060 at 70 rpm with CS-17 abrasive-coated wheels and 1000 grams load

Rockwell International Test Report of January 8, 1992

Rockwell International Test Report of January 8, 1992

RoHS 2, REACH, and Conflict Minerals Statement

None of the RoHS 2 restricted materials, or REACH substances of very high concern as of 2015/06/15, or Conflict Minerals are intentionally added in manufacturing this product. Ref: European Union Directive 2011/65/EU and Regulation (EC) No. 1907/2006/CE. See Protektive Pak terms and conditions.



Made in the United States of America

Specifications and procedures subject to change without notice

CLOSED BIN BOXES			
<p>PROTEKTIVE PAK 13520 MONTE VISTA AVENUE, CHINO, CA 91710</p> <p>PHONE (909) 627-2578 ProtektivePak.com</p>	<p>DRAWING NUMBER</p> <p>37590</p>	<p>DATE:</p> <p>January 2016</p>	

Unless otherwise noted, tolerance is ±10%