


Dispensing robot



Desktop QUICK ET8483 (S)

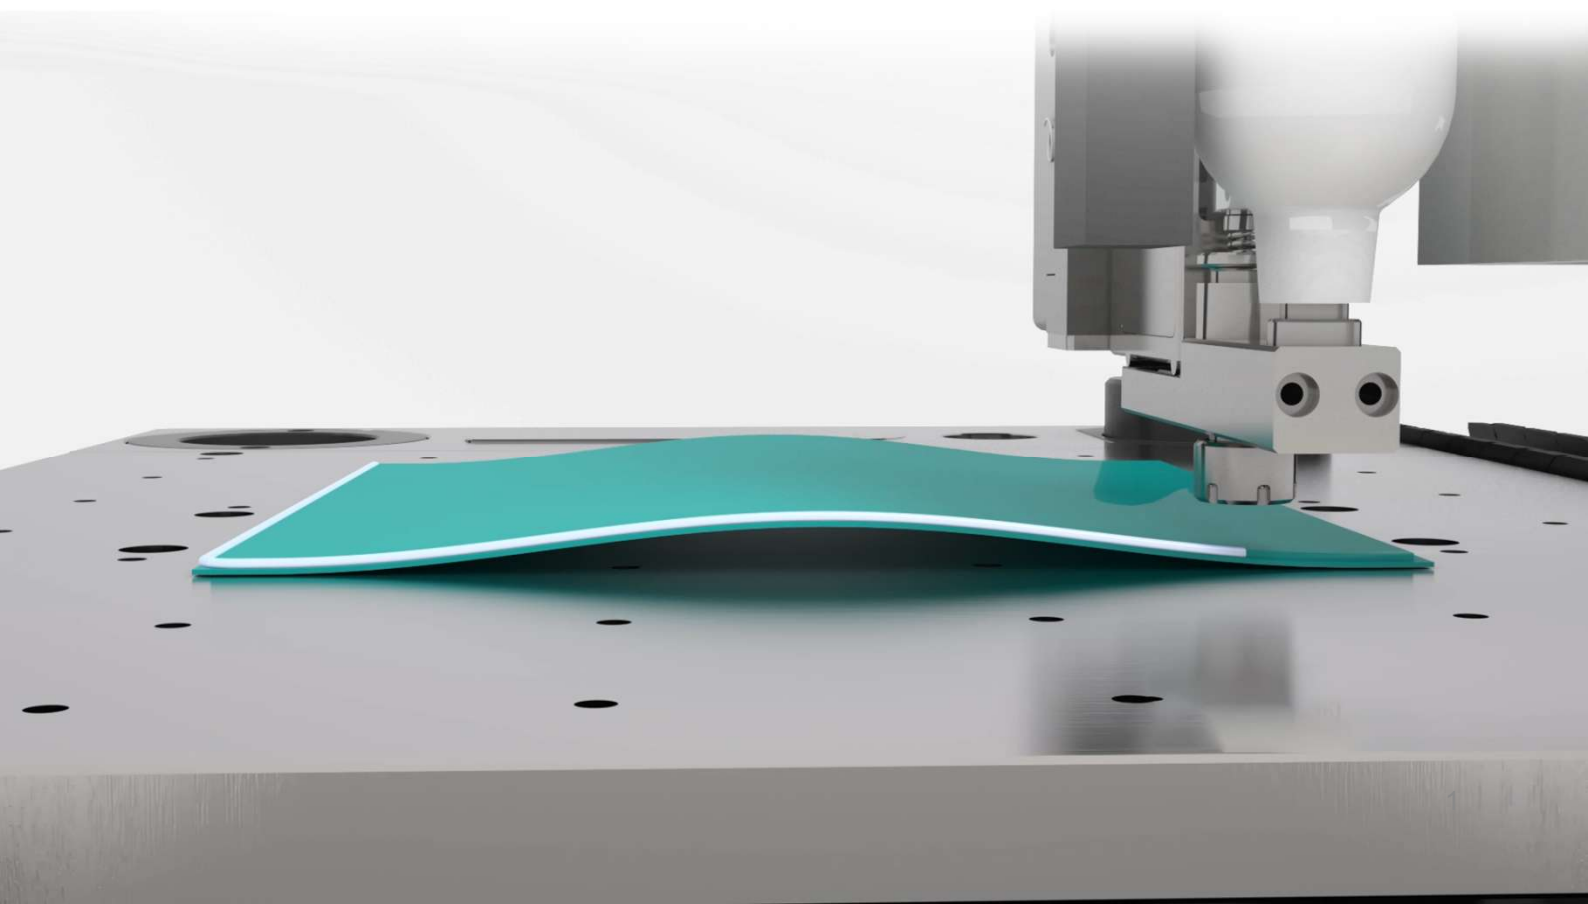

Specifications

Model		QUICK ET8483	QUICK ET8483S
Power supply		100~240VAC	100~240VAC
Axis		3 axis	3 axis
Moving range		400*400*100mm	400*400*100mm
Moving range	X/Y axis	400 mm	400 mm
	Z axis	100 mm	100 mm
Speed range	X/Y axis	0.1~600 (mm/sec)	0.1~600 (mm/sec)
	Z axis	0.1~300 (mm/sec)	0.1~300 (mm/sec)
Repeat accuracy		X/Y/Z axis 0.01 mm	0.01 mm
Payload	Platform	8 Kg	8Kg
	Head(Z axis)	2 Kg(Stepper Motor + timing belt)	5Kg(Stepper Motor + lead screw)
Speed control		Three-dimensional linear, arc interpolation etc.	
Teaching files capacity		Max 255 files, Max 60000 points	Max 255 files, Max 60000 points
Process files capacity		Max 128 files	Max 128 files
Environment	Temperature	0~40°C	0~40°C
	Humidity	20%~90% (no condensation)	20%~90% (no condensation)
Overall dimensions W×D×H (mm)		710*760*645mm	710*760*645mm
Weight (kg)		48kg	49kg

Overall Dimension

