


PRODUCT INFORMATION

THE QUICKEST SOLUTION FOR COMPONENTS IN STICK

Europlacer's programmable belt feeder (E 112735) is the flexible solution for components in sticks. It allows for the distribution of SO, SO medium, SO large, TSSOP type components and others, utilising a base plate with the ability to fit feeder sticks into eight positions.

It is fully 'intelligent' featuring the same intelligence as the other feeders in the Europlacer range, offering:

- Component recognition
- Data entry by micro-terminal and bar codes
- Auto adjustment of pick-up offset
- Batch ID for traceability reports

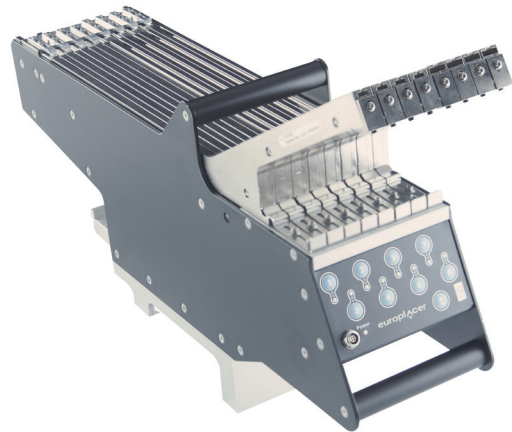

BELT UNITS:

Ref.	Component	Max. width (mm)	Max. height (mm)
E112732	SO	6.1	1.8
E112733	SO M	7.4	2.3
E112734	SO L	10.6	2.9
E112918	TSSOP >=14	6.4	1.2
E113123	MSOP	4.9	1.1
E113293	High SO L	10.6	4.1
E113206	DIPSWITCH 4	10.6	4.1
E113294	TSSOP W	8.1	1.2
E113295	OSCILLATOR 8P	9.8	4.2
E113296	OSCILLATOR 4P	9.6	4.6
E113391	SSOP	7.9	1.9
E113402	SMD 4	9.8	4
E113403	DKPAK	9.7	2.3
E113420	SO High	6.1	3.5
E113418	SOCKET 32 (*)	18.2	4.7
E113419	TO263 5 pins (*)	14.4	4.6

(*) Wide version, twice wider than standard unit, fills 3 positions.

Other types on demand.

Possible configurations:

- 8 standard elements
- 1 wide + 5 standard
- 2 wide + 3 standard
- 3 wide + 1 standard



FEATURES & BENEFITS

- Different types of SO can be fitted on the same base
- Refill without stopping the machine
- Easy reconfiguration
- Fast product changeover
- Allows nearly the same speed as tape feeders
- Each feeder stick has the same intelligence as the other feeders in the Europlacer range

As part of our policy of continuous development, specifications are subject to change without prior notice.